

TACOVENT VENT

HEATING RADIATOR VENT VALVES



Permanent and automatic venting.

DESCRIPTION

The TacoVent Vent valves can be used in all systems of water. The valve automatically vents hydraulic systems such as heating radiators, pipe manifolds, pipes, boilers, reservoirs and underfloor heating manifolds on a continuous basis. This automatic function improves operational safety (corrosion reduction) and enhances the user's comfort (no airborne noises). The manual quick-venting allows the fast filling in of the system due to the venting capacity.

INSTALLATION POSITION

Vertically upwards and horizontally.

OPERATION

The automatic operation of the vent valve relies on the special swelling discs built in the valve insert. In dry conditions, the swell discs allow air and gas to escape. The immediate swelling prevents water leakage. Manual air venting is achieved by undoing the knurled screw and allowing air and gas to escape. Replacement of the valve insert (including seal and swelling discs) is possible due to the automatic check valve integrated in the vent valve. At the first start of operation, it's possible that a few drops come out as long as the swelling discs are dry. This doesn't occur in operation.

ADVANTAGES


- Reliable, long-life operation
- Versatile application in water-ducting systems
- Additional manual quick-venting
- Built-in automatic check valve requires no draining of the system in case of replacement of the valve insert
- Small and compact design
- Saving of energy by optimal vented system

BUILDING CATEGORIES

For pipe installations in heating area:

- Apartment blocks, housing estates, multiple dwelling units
- Residential care facilities, hospitals
- Administration and service buildings
- Hotels and restaurants, industrial kitchens
- School buildings and sports facilities
- Commercial and industrial buildings

SYSTEM/BASIC DIAGRAM

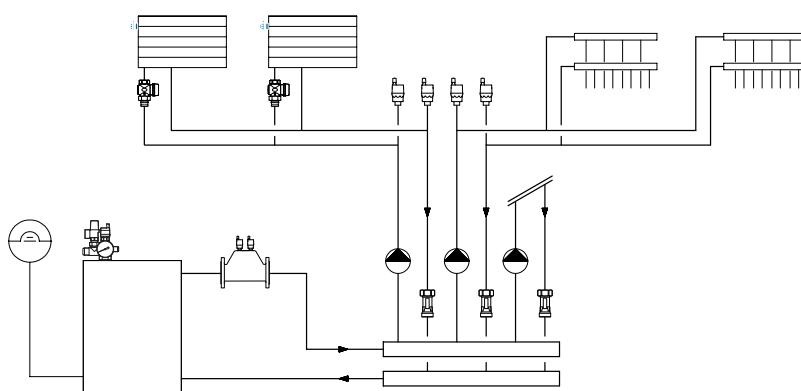

TACOVENT VENT | HEATING RADIATOR VENT VALVES

SPECIFICATION TEXT

See www.taconova.com

TECHNICAL DATA

General

- Operating temperature $T_{0\max}$: 115 °C
- Operating pressure $P_{0\max}$: 8.5 bar
- Nominal width:
 - $\frac{1}{8}$ " – $\frac{3}{8}$ "
 - $\frac{1}{2}$ " self-sealing (O-ring)

Material

- Valve body: brass nickel-plated
- Valve insert: brass nickel-plated
- Automatic check valve: stainless steel
- Seals: silicone, EPDM

Fluids


- Heating water (VDI 2035; SIA Directive 384/1; ÖNORM H 5195-1)
- Water free of chemical additives

TYPE OVERVIEW

TacoVent Vent | Heating Radiator Vent Valves

Order no.	DN	G	Self-sealing
240.5417.000	6	$\frac{1}{8}$ "	–
240.5418.000	8	$\frac{1}{4}$ "	–
240.5419.000	10	$\frac{3}{8}$ "	–
240.5420.000	15	$\frac{1}{2}$ "	✓

DIMENSIONAL DRAWING

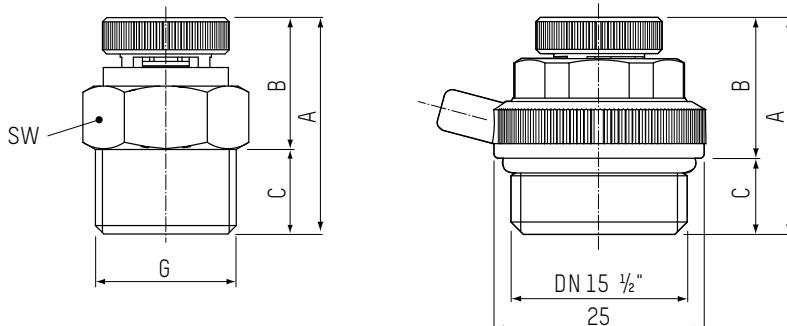


MEASUREMENT TABLE

TacoVent Vent | Heating Radiator Vent Valves

Order no.	G	A	B	C	SW
240.5417.000	$\frac{1}{8}$ "	26	16	10	14
240.5418.000	$\frac{1}{4}$ "	26	16	10	14
240.5419.000	$\frac{3}{8}$ "	26	16	10	17
240.5420.000	$\frac{1}{2}$ "	26	17	9	19

SECTIONAL DRAWING

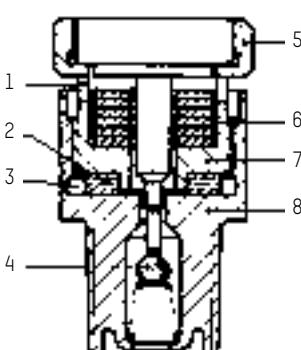

- 1 Air outlet of automatic venting
- 2 Seal
- 3 Air outlet of manual venting
- 4 Automatic check valve
- 5 Head of valve insert for manual venting
- 6 Swelling discs
- 7 Valve insert
- 8 Valve body

SPARE PART



COMPLETE VALVE INSERT

Order no.	Version
298.4001.000	Including seal and swelling discs

CONTACT AND FURTHER INFORMATION

Taconova Group AG | Steinackerstr. 6 | CH-8902 Urdorf | T +41 44 735 55 55 | F +41 44 735 55 02 | group@taconova.com | taconova.com

TACONOVA.COM