

Vesipostiventtiili
 DN 15 øCu 15
 Mitoitussuositus 0.2 l/s/160 kPa

- Piha
- Seinäasennus





Tekniset tiedot


Tekniset ominaisuudet

DN koko (normimitta) **DN15**

Tyypihyväksynät

STF sertifikaatti **STF VTT-RTH-00105-11**

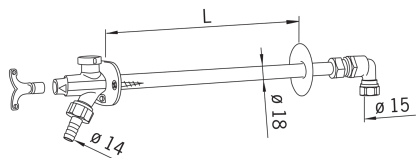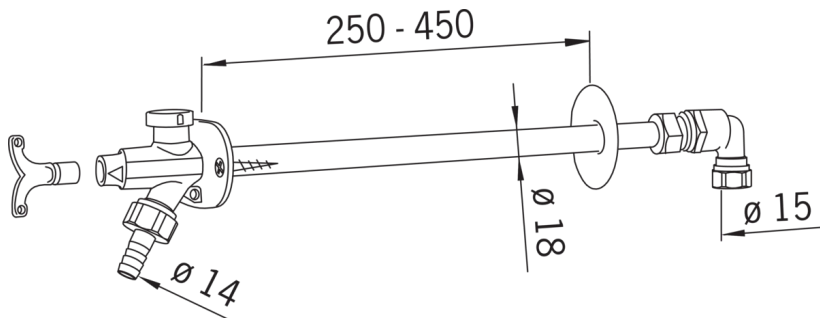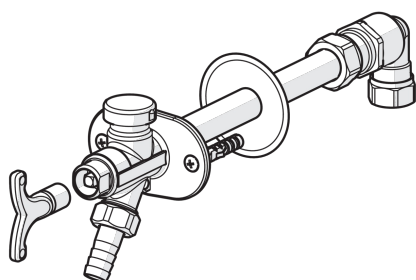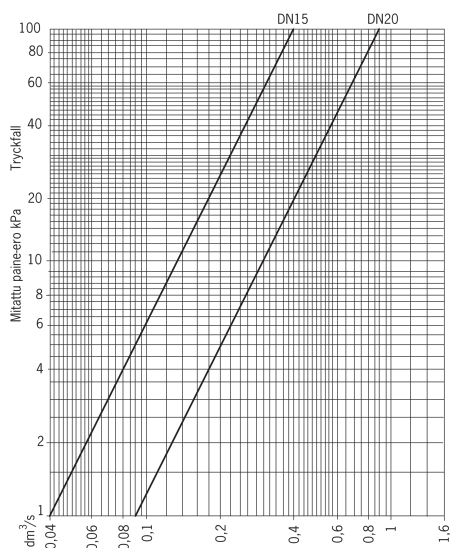

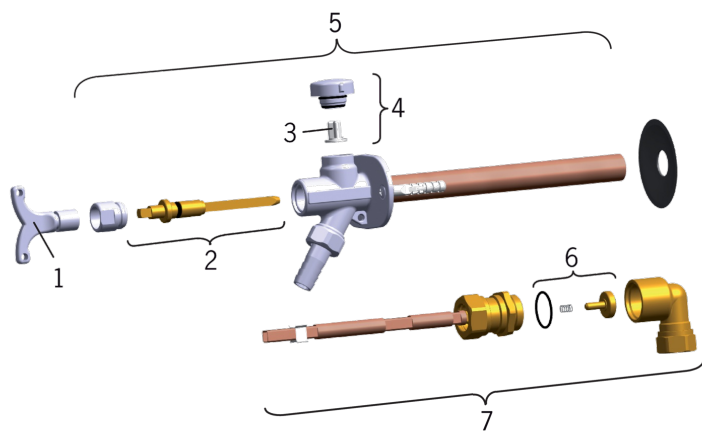

SP431015

	Koodi	LVI (Suomi)
01	438126	6421873
02	438091	6421866
02	438084	6421944
03	438124	6421871
04	438090	6421867
05	438083	6421943
05	438093	6421869
06	438281V	6421874
07	438092V-25	6420654
07	438092	6421868